totalElement

SPECIFICATION SHEET
Part no. 191334409

Bar Magnet

1/4 x 1/4 x 1 Inch (6.35 x 6.35 x 25.40 mm)

Width x Length x Thickness


ISOMETRIC VIEW — Not to scale




SPECIFICATIONS	
WIDTH	0.250 Inch [6.35 mm]
LENGTH	0.250 Inch [6.35 mm]
THICKNESS	1.000 Inch [25.40 mm]
TOLERANCE	±0.004 Inch [±0.10 mm]
MATERIAL	Sintered Neodymium (NdFeB)
GRADE	N48
COATING	Nickel-Copper-Nickel (Ni-Cu-Ni)
MAGNETIZATION	Through the thickness
PULL FORCE	6.18 lbs (2.8 kg)
SURFACE FIELD	7,030 Gauss (703 mT)
WEIGHT (EACH)	7.8 g (0.28 oz)

DIMENSIONS

Inch [mm] · not to scale

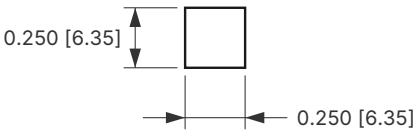


TOP VIEW



FRONT VIEW

MAGNETIZATION



Magnetized through the 1.000 [25.40] dimension. Pole faces shown for illustration.

GRADE PROPERTIES · N48

PROPERTY	SI	CGS / IMPERIAL
Remanence (Br)	1.37–1.43 T	13.7–14.3 kG
Coercivity (Hcb)	≥ 836 kA/m	≥ 10.5 kOe
Intrinsic coercivity (Hcj)	≥ 876 kA/m	≥ 11 kOe
Max. energy product (BH)max	366–390 kJ/m³	46–49 MGOe
Max. operating temperature	80 °C	176 °F

Typical values for sintered NdFeB of grade N48 at room temperature, not measured on this part. The highest safe working temperature also depends on the magnet's shape and how it's used.

Handling: neodymium magnets are brittle and can chip, or pinch skin, if they snap together. Keep them away from pacemakers and magnetic media.

VIEW ONLINE

Scan to open this magnet on totalElement.com.

CAD FILES

The technical drawing and 3D model are on the product page.

totalElement
totalElement.com
help@totalelement.com
1 (855) 328-2822