totalElement

SPECIFICATION SHEET
Part no. B34X12X18N52

# Bar Magnet

## 3/4 x 1/2 x 1/8 Inch (19.05 x 12.70 x 3.18 mm)

Width x Length x Thickness

ISOMETRIC VIEW

Not to scale

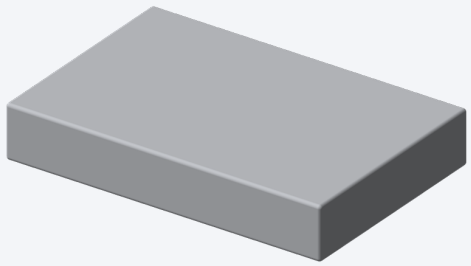

SPECIFICATIONS

| | |
|---|---|
| WIDTH | 0.750 Inch [19.05 mm] |
| LENGTH | 0.500 Inch [12.70 mm] |
| THICKNESS | 0.125 Inch [3.18 mm] |
| TOLERANCE | ±0.004 Inch [±0.10 mm] |
| MATERIAL | Sintered Neodymium (NdFeB) |
| GRADE | N52 |
| COATING | Nickel-Copper-Nickel (Ni-Cu-Ni) |
| MAGNETIZATION | Through the thickness |
| PULL FORCE | 11.2 lbs (5.1 kg) |
| SURFACE FIELD | 2,627 Gauss (263 mT) |
| WEIGHT (EACH) | 5.8 g (0.2 oz) |

DIMENSIONS Inch [mm] · not to scale

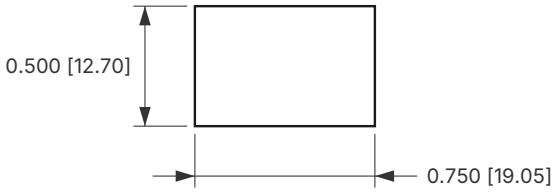


TOP VIEW

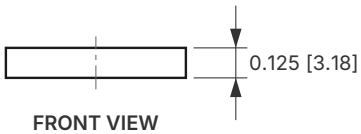


FRONT VIEW

MAGNETIZATION

Magnetized through the 0.125 [3.18] dimension. Pole faces shown for illustration.

GRADE PROPERTIES · N52

| PROPERTY | SI | CGS / IMPERIAL |
|---|---|---|
| Remanence (Br) | 1.43–1.48 T | 14.3–14.8 kG |
| Coercivity (Hcb) | ≥ 836 kA/m | ≥ 10.5 kOe |
| Intrinsic coercivity (Hcj) | ≥ 876 kA/m | ≥ 11 kOe |
| Max. energy product (BH)max | 398–422 kJ/m³ | 50–53 MGOe |
| Max. operating temperature | 80 °C | 176 °F |

Typical values for sintered NdFeB of grade N52 at room temperature, not measured on this part. The highest safe working temperature also depends on the magnet's shape and how it's used.

Handling: neodymium magnets are brittle and can chip, or pinch skin, if they snap together. Keep them away from pacemakers and magnetic media.

VIEW ONLINE

Scan to open this magnet on totalElement.com.

CAD FILES

The technical drawing and 3D model are on the product page.

totalElement
totalElement.com
help@totalelement.com
1 (855) 328-2822