

Disc Magnet

1/2 x 1/32 Inch (12.70 x 0.79 mm)


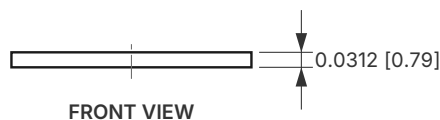
Diameter x Thickness

ISOMETRIC VIEW

Not to scale

**SPECIFICATIONS**

DIAMETER	0.500 Inch [12.70 mm]
THICKNESS	0.0312 Inch [0.79 mm]
TOLERANCE	±0.004 Inch [±0.10 mm]
MATERIAL	Sintered Neodymium (NdFeB)
GRADE	N52
COATING	Nickel-Copper-Nickel (Ni-Cu-Ni)
ADHESIVE	3M VHB 4920
MAGNETIZATION	Axially, through the thickness
PULL FORCE	1.45 lbs (0.66 kg)
SURFACE FIELD	920 Gauss (92 mT)
WEIGHT (EACH)	0.8 g (0.028 oz)

DIMENSIONS Inch [mm] · not to scale**MAGNETIZATION****TOP VIEW****FRONT VIEW**

Axially magnetized through the 0.0312 [0.79] thickness. Pole faces shown for illustration.

GRADE PROPERTIES · N52

PROPERTY	SI	CGS / IMPERIAL
Remanence (Br)	1.43–1.48 T	14.3–14.8 kG
Coercivity (Hcb)	≥ 836 kA/m	≥ 10.5 kOe
Intrinsic coercivity (Hcj)	≥ 876 kA/m	≥ 11 kOe
Max. energy product (BH)max	398–422 kJ/m ³	50–53 MGOe
Max. operating temperature	80 °C	176 °F

Typical values for sintered NdFeB of grade N52 at room temperature, not measured on this part. The highest safe working temperature also depends on the magnet's shape and how it's used.

Handling: neodymium magnets are brittle and can chip, or pinch skin, if they snap together. Keep them away from pacemakers and magnetic media.

**VIEW ONLINE**

Scan to open this magnet on
totalElement.com.

CAD FILES

The technical drawing and 3D model are on the
product page.

totalElement

totalElement.com
help@totalelement.com
1 (855) 328-2822