


Disc Magnet

6 x 3 mm (0.2362 x 0.1181 Inch)

Diameter x Thickness

ISOMETRIC VIEW

Not to scale

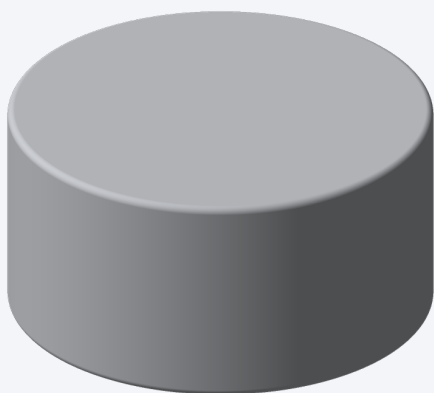


SPECIFICATIONS

DIAMETER	6.00 mm [0.2362 Inch]
THICKNESS	3.00 mm [0.1181 Inch]
TOLERANCE	±0.10 mm [±0.004 Inch]
MATERIAL	Sintered Neodymium (NdFeB)
GRADE	N42
COATING	Nickel-Copper-Nickel (Ni-Cu-Ni)
MAGNETIZATION	Axially, through the thickness
PULL FORCE	2 lbs (0.91 kg)
SURFACE FIELD	4,667 Gauss (467 mT)
WEIGHT (EACH)	0.6 g (0.021 oz)

DIMENSIONS mm [Inch] · not to scale

MAGNETIZATION



TOP VIEW



FRONT VIEW



Axially magnetized through the 3.00 [0.1181] thickness. Pole faces shown for illustration.

GRADE PROPERTIES · N42

PROPERTY	SI	CGS / IMPERIAL
Remanence (Br)	1.28–1.33 T	12.8–13.3 kG
Coercivity (Hcb)	≥ 915 kA/m	≥ 11.5 kOe
Intrinsic coercivity (Hcj)	≥ 955 kA/m	≥ 12 kOe
Max. energy product (BH)max	318–342 kJ/m ³	40–43 MGOe
Max. operating temperature	80 °C	176 °F

Typical values for sintered NdFeB of grade N42 at room temperature, not measured on this part. The highest safe working temperature also depends on the magnet's shape and how it's used.

Handling: neodymium magnets are brittle and can chip, or pinch skin, if they snap together. Keep them away from pacemakers and magnetic media.



VIEW ONLINE

Scan to open this magnet on
totalElement.com.

CAD FILES

The technical drawing and 3D model are on the
product page.

totalElement

totalElement.com
help@totalelement.com
1 (855) 328-2822